RevNo	Revision note	Date	Signature	Checked

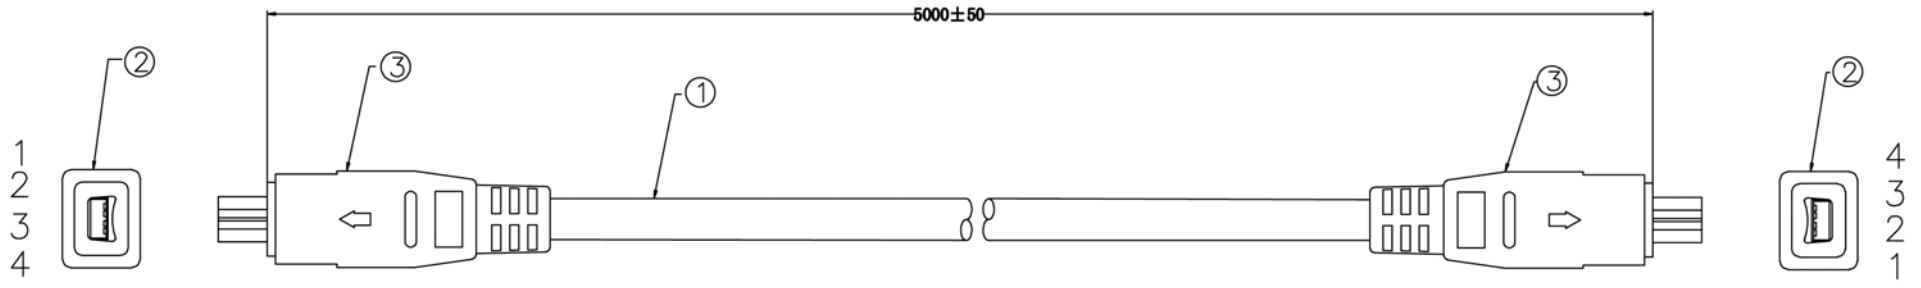

P1

P2

PIN OUT

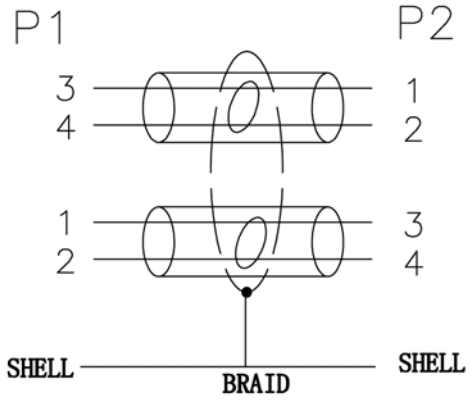

REQUIREMENTS:

1:100% short and open testing.

2:Test conditions
DC300V /10MS
Insulation resistance 10MΩ(Min)
Conduction resistance 5Ω(Max)

NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT
③	MOLDED	BLACK 45P PVC	0.028	KG
②	CONNECTOR	1394 4PIN MALE	2	PCS
①	CABLE	UL20379 (30AWG*2C+D+AL)*2C+FILLER+MYLAR +AL+B(TC) OD:5.5MM,BLACK JACKET	5	M

Ltemref	Quantity	Title/Name,designation,material,dimension etc		Article No./Reference	
Designed by	Checked by	Approved by - date MARCH 4.2012	File name 1394 4P/M-4P/M L=5M	Date MARCH 4.2012	Scale FREE
		26-0802			
		26-0802		Edition 1	Sheet 1/2